

# CAVS Network Karaoke System

Version 3.0



## 0. Content

- 1. Tripp Lite B021-000-19 19" LCD Console
- 2. Synology RS422+ NAS Server
- 3. CAVS JB-199 IV Online
- 4. CAVS JB-199 mini II
- 5. Dell Inspiron 5410 Touch All-in-one PC
- 6. E-Songbook Lenovo Duet 3i
- Appendix 1. URL Whitelist for VLAN323
- Appendix 2. Data Sync and Map Drive
- Appendix 3. Advertisement and Background video

## 1. Tripp Like B021-000-19 19" LCD Console

### Installation

The KVM unit is designed as 1U rackmountable. To support its heavy weight, be sure to connect both the front and back rackears of the KVM firmly into front and back of the rack system.



## Connection



Use the USB KVM cable enclosed with the KVM to connect the VGA connector on the back of the KVM to a HDMI connector on the back of the CAVS JB-199 mini II.



The VGA + PS/2 end of the USB KVM cable connects to the CAVS JB-199 mini II's HDMI and USB connectors in the following ways.

- Use the enclosed HDMI to VGA converter to connect the cable's VGA end to a HDMI connector of the CAVS JB-199 mini II.



Any one of the two HDMI connectors on the back of the CAVS JB-199 mini II can be used.

- Use the enclosed PS/2 to USB adapter to connect the cable's PS/2 end to a USB connector of the CAVS JB-199 mini II.



Use the VGA only end of the USB KVM cable to connect to the KVM's VGA connector.

Connect the enclosed power cable to a power source and turn on the KVM.

## 2. Synology RS422+ Nas Server

### Assembly

The NAS server first requires assembly. Insert the hard drives numbered 1 - 4 into the slots numbered 1 - 4 of the NAS server. The numbers must match and be sure to push in the hard drives firmly to snap close the lock handles.





Next attach the enclosed rackears to the NAS server. There are only 2 front rackears.



### Connection

Connect an Ethernet port on the back of the NAS server to the ship network/VLAN323 using the enclosed LAN cable. You can use any one of the two Ethernet ports to connect. Note the MAC address corresponding to the connected Ethernet port. It is written on the back and will be needed to enable the NAS server in the VLAN323. Connect the enclosed power cable to a power source. Power on by pressing the Start button in the top of the front panel.



### Setting IP address

When connecting the NAS server to the VLAN323 for the first time, it is required to set the IP address of the NAS server within the range of the IP address allowed in the VLAN323. Connect directly an Ethernet port of the NAS server to an Ethernet port of a laptop installed with Synology Assistant program. Run the Synology Assistant program in the laptop and follow the program instruction to set the IP address for the NAS server. The Synology Assistant program can be downloaded from Synology.com website.



## 3. CAVS JB-199 mini II for Broadcasting Center

### Assembly

CAVS JB-199 mini II for Broadcasting Center is marked as CAVS JB-199 mini II - 1, Broadcasting Center. It is specially equipped with 32G DRAM and 4T M.2 SSD. It also comes with a rack shelf to which the attachment can be made using a velcro tape. Since the main roll of the CAVS JB-199 mini II in the Broadcasting Center is to provide access to the NAS server, it would be best placed physically near the NAS server in the rackmount.



## Connection to KVM in Broadcasting Center

Use the USB KVM cable enclosed with the KVM to connect the VGA connector on the back of the KVM to a HDMI connector on the back of the CAVS JB-199 mini II.



The VGA + PS/2 end of the USB KVM cable connects to the CAVS JB-199 mini II's HDMI and USB connectors in the following ways.

- Use the enclosed HDMI to VGA converter to connect the cable's VGA end to a HDMI connector of the CAVS JB-199 mini II.



Any one of the two HDMI connectors on the back of the CAVS JB-199 mini II can be used.

- Use the enclosed PS/2 to USB adapter to connect the cable's PS/2 end to a USB connector of the CAVS JB-199 mini II.



Use the VGA only end of the USB KVM cable to connect to the KVM's VGA connector.

Connect the enclosed power cable to a power source and turn on the CAVS JB-199 mini II.

## Finding MAC address

After powering on the CAVS JB-199 mini II, use the KVM keyboard, mouse, and monitor to operate the CAVS JB-199 mini II. Inside the CAVS JB-199 mini II, go to Command Prompt and type in "ipconfig /all". Look for "Physical Address" which is the CAVS JB-199 mini II's MAC address.

## Setting IP address

When connecting the CAVS JB-199 mini II to the ship network/VLAN323 for the first time, it is required to set the IP address of the CAVS JB-199 mini II within the range of the IP address allowed in the VLAN323. In the CAVS JB-199 mini II, go to Open Networks & Internet setting > Ethernet > Change adapter options. Right click on the Ethernet port which is connected to the ship network/VLAN323 and select Properties. If the JB-199 mini II is connected wirelessly to the ship network/VLAN323, go to Open Network & Internet setting > Wi-Fi > Change adapter options. Right click on the wireless port and select Properties. Next select Internet Protocol Version 4 (TCP/IPv4) and click Properties. Select the Use the following IP address and fill in the IP

address, Subnet mask, and Default gateway. Also select Use the following DNS server address, and fill in the Preferred DNS server and Alternate DNS server. Click OK and exit. Reboot the JB-199 IV Online player.

## 4. CAVS JB-199 mini II for Karaoke Lounge

### Assembly

Attach the JB-199 mini II onto a rack shelf. Use velcro tapes rather than screws to attach the player to the shelf.



### Connection to AV system in lounge

- Connect the enclosed Red license dongle to a USB port on the front of the JB-199 mini II player.
- Connect the enclosed wireless keyboard & mouse receiver dongle to a USB port on the front of the JB-199 mini II player.
- Connect one HDMI connector on the back of the JB-199 mini II player to a control monitor using an enclosed HDMI to HDMI cable.
- Connect the other HDMI connector on the back of the JB-199 mini II player to a wall TV using an enclosed HDMI to HDMI cable.
- Connect the head phone jack on the front of the JB-199 mini II player to the mixer/sound system using the enclosed Jack to RCA cable.
- Connect the Ethernet port on the back of the JB-199 mini II player to the ship network/VLAN323 using the enclosed LAN cable.
- Alternatively use the Wi-Fi connector in the JB-199 mini II player to connect to the ship network/VLAN323.
- Connect the enclosed power cable to a power source. Power on.



### Finding MAC address

After powering on the JB-199 mini II, use the keyboard and mouse to go to Command Prompt and type in "ipconfig /all". Look for "Physical Address" which is the JB-199 mini II MAC address.

### Setting IP address

When connecting the JB-199 mini II player to the ship network/VLAN323 for the first time, it is required to set the IP address of the JB-199 mini II player within the range of the IP address allowed in the VLAN323. Inside the JB-199 mini II, go to Open Networks & Internet setting > Ethernet > Change adapter options. Right click on the Ethernet port and select Properties. If the JB-199 mini II is connected wirelessly to the ship network/VLAN323, go to Open Network & Internet setting > Wi-Fi > Change adapter options. Right click on the Wireless port and select Properties. Next select Internet Protocol Version 4 (TCP/IPv4) and click Properties. Select the "Use the following IP address" and fill in the IP address, Subnet mask, and Default gateway. Also

select "Use the following DNS server address", and fill in the Preferred DNS server and Alternate DNS server. Click OK and exit. Reboot the JB-199 mini II player.

## 5. Lenovo IdeaCentre AIO Touch Screen Karaoke Player

### Assembly

The unit comes in a carry case.




Remove all parts from the case. Snap in the leg stand and upright the Touch Screen karaoke player as shown below.



### Connection

- Connect the enclosed Red license dongle to a USB port on the back of the Touch Screen player.
- Connect the enclosed wireless keyboard & mouse receiver dongle to a USB port on the back of the Touch Screen player.
- Connect the Touch Screen player to a power source using its enclosed power cable. Connect the docking station to a power source using its enclosed power cable. Each has its own power supply cable.
- Connect the Touch Screen player to the docking station using the enclosed USB-B cable.

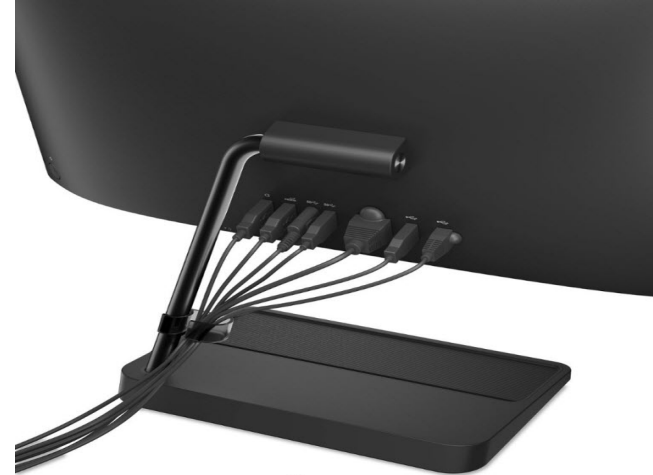

- Connect one HDMI connector on the docking station to a control monitor.
- Connect the other HDMI connector on the docking station to a wall TV.
- Connect the head phone jack on the docking station to the mixer/sound system using the enclosed Jack to RCA cable.
- Connect the Ethernet port on the docking station to the ship network/VLAN323.
- Alternatively use the Wi-Fi connector in the Touch Screen player to connect to the ship network/VLAN323.

## Finding MAC address

After powering on the Touch Screen player, use the keyboard and mouse to go to Command Prompt and type in "ipconfig /all". Look for "Physical Address" which is the MAC address of the Dell AIO player.


## Setting IP address

When connecting the Dell AIO player to the VLAN323 for the first time, it requires to set the IP address of the Dell AIO player within the range of the IP address allowed in the VLAN323. Inside the Dell AIO player, go to Open Networks & Internet setting > Ethernet > Change adapter options. Right click on the Ethernet port which is connected to the ship network/VLAN323 and select Properties. If connected wirelessly, go to Open Networks & Internet setting > Wi-Fi > Change adapter options. Right click on the wireless port which is connected to the ship network/VLAN323 and select Properties. Next select Internet Protocol Version 4 (TCP/IPv4) and click Properties. Select the Use the following IP address and fill in the IP address, Subnet mask, and Default gateway. Also select Use the following DNS server address, and fill in the Preferred DNS server and Alternate DNS server. Click OK and exit. Reboot the Dell AIO player.

# 6. Lenovo Tablet P12 12.6"

## Assembly

Lenovo Tablet P12 comes with 12.6" 2K Touch Screen, Precision Pen, and a charging cable. It runs up to 10.7 hours on fully charged battery.

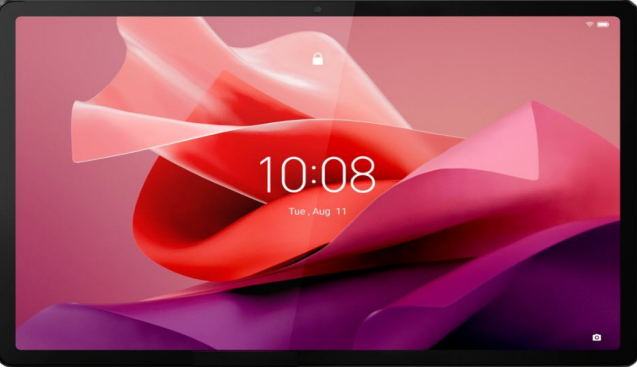

### Connection

There are two ways to connect the Lenovo Tablet P12 for karaoke use.

- Passengers: Connect the tablet wirelessly to the ship network and click on a link or scan a QR code to connect to the NAS server at port 5003. Passengers can browse the songbook and inform the karaoke hosts the song numbers of the songs that they like to sing.
- Hosts: Connect the tablet wirelessly to the ship network and input an IP address or scan a QR code to connect to the karaoke player at the port 5000. The hosts can reserve, play, stop, or cancel the songs in the karaoke player.

### Finding MAC address

After starting the tablet, go to Command Prompt and type in "ipconfig /all". Look for "Physical Address" which is the MAC address.

### Setting IP address

When connecting the tablet to the ship network in all three cases above, it is required to set the IP address of the tablet according to the instruction of the IT administration. Go to Open Networks & Internet setting > Wi-Fi > Change adopter options. Right click on the wireless port which is connected to the ship network and select Properties. Next select Internet Protocol Version 4 (TCP/IPv4) and click Properties. Select the Use the following IP address and fill in the IP address, Subnet mask, and Default gateway. Also select Use the following DNS server address, and fill in the Preferred DNS server and Alternate DNS server. Click OK and exit. Reboot the tablet.

## Appendix 1. URL Whitelist for VLAN323

The VLAN323 requires the following whitelist of URLs.

CAVS USA Inc	Port
cavskaraoke000.synology.me	1194
cavskaraoke003.synology.me	1194

Microsoft	Port
windowsupdate.microsoft.com	443
*.windowsupdate.microsoft.com	443
*.update.microsoft.com	443
*.windowsupdate.com	443
download.windowsupdate.com	443
download.microsoft.com	443
*.download.windowsupdate.com	443
wustat.windows.com	443
ntservicepack.microsoft.com	443



go.microsoft.com	443
------------------	-----

<b>Synology</b>	<b>Port</b>
account.synology.com	443
api.insight.synology.com	443
api.segment.io	443
api.wootric.com	443
apiauth.quickconnect.to	443
auth.docker.io	443
autoupdate7.synology.com	443
cdn.auth0.com	443
cdn.segment.com	443
cdn.wootric.com	443
checkip.dyndns.org	443
checkip.synology.com	443
checkip.webrtc.quickconnect.to	443
checkipv6.quickconnect.to	443
checkipv6.synology.com	443
checkport.synology.com	82
codecstatistic.synology.com/codec_feedback.php	443
collectorautoupdate7.synology.com	443
collectorupdate7.synology.com	443
czr1.re.cs.quickconnect.to	443
czr2.re.cs.quickconnect.to	443
dataautoupdate7.synology.com	443
database.clamav.net	443
dataupdate.synology.com	443
dataupdate7.synology.com	443
ddns.synology.com	443
dec.quickconnect.to	443
der3.re.cs.quickconnect.to	443
der4.re.cs.quickconnect.to	443
der7.re.cs.quickconnect.to	443
der8.re.cs.quickconnect.to	443
desktop.docker.com	443
docker.io	443
docker-pinata-support.s3.amazonaws.com	443
download.synology.com	443
download.synology.com/routerdb	443
dseasb33srmn.cloudfront.net	443

elb-io.us-east-1.aws.dckr.io	443
elb-registry.us-east-1.aws.dckr.io	443
frlp.lp.cs.quickconnect.to	443
frp1.punch.cs.quickconnect.to	443
frp2.punch.cs.quickconnect.to	443
frp3.punch.cs.quickconnect.to	443
frp4.punch.cs.quickconnect.to	443
frr2.re.cs.quickconnect.to	443
frr3.re.cs.quickconnect.to	443
frr4.re.cs.quickconnect.to	443
global.download.synology.com	443
global.geo.synology.com/multilingual_reverse.php	443
global.quickconnect.to	443
global.synologydownload.com	443
gofile.me	443
help.synology.com	443
help.synology.com/spreadsheet/	443
hub.docker.com	443
hub.docker.com/_/node	443
identity.us.c2.synology.com	443
index.docker.io	443
jpr4.re.cs.quickconnect.to	443
jpr5.re.cs.quickconnect.to	443
kb.synology.com	443
ldap.identity.us.c2.synology.com	443
license.synology.com	443
login.docker.com	443
myds.synology.com	443
notification.synology.com	443
notify.bugsnag.com	443
orlp.lp.cs.quickconnect.to	443
orp1.punch.cs.quickconnect.to	443
orp2.punch.cs.quickconnect.to	443
payment.synology.com	443
pkgautoupdate7.synology.com	443
pkgupdate7.synology.com	443
production.cloudflare.docker.com	443
registry.hub.docker.com	443
registry.npmjs.org	443
registry-1.docker.io	443

registry-origin.docker.io	443
report.synology.com/upload.php	443
sessions.bugsnag.com	443
sgr3.re.cs.quickconnect.to	443
sgr4.re.cs.quickconnect.to	443
signal1.fr.webrtc.quickconnect.to	443
signal1.or.webrtc.quickconnect.to	443
signal1.ty.webrtc.quickconnect.to	443
signal2.fr.webrtc.quickconnect.to	443
signal2.or.webrtc.quickconnect.to	443
signal2.ty.webrtc.quickconnect.to	443
signal3.fr.webrtc.quickconnect.to	443
signal4.fr.webrtc.quickconnect.to	443
sns.synology.com	443
subscribe.insight.synology.com	443
supapi.synology.com	443
synocloudsync.synology.com	443
synoconf.synology.com	443
synoconfkms.synology.com	443
synosurveillance.synology.com	443
twc.quickconnect.to	443
twr1.re.cs.quickconnect.to	443
twr2.re.cs.quickconnect.to	443
twr5.re.cs.quickconnect.to	443
twr6.re.cs.quickconnect.to	443
twr7.re.cs.quickconnect.to	443
twr8.re.cs.quickconnect.to	443
tylp.lp.cs.quickconnect.to	443
typ1.punch.cs.quickconnect.to	443
typ2.punch.cs.quickconnect.to	443
update.nai.com	443
update.synology.com	443
update.synology.com/btsearchupdate/getServerInfo.php	443
update.synology.com/filehostupdate/getfilehosts.php	443
update7.synology.com	443
us.c2.synology.com	443
usc.quickconnect.to	443
us-east-1-elbio-rm5bon1qaeo4-623296237.us-east-1.elb.amazonaws.com	443
us-east-1-elbregis-10fucsvj1tcgy-133821800.us-east-1.elb.amazonaws.com	443
usr1.re.cs.quickconnect.to	443

usr2.re.cs.quickconnect.to	443
usr5.re.cs.quickconnect.to	443
usr6.re.cs.quickconnect.to	443
utyupdate.synology.com	443
www.synology.com	443
www.synology.com/company/legal/privacy	443
www.synology.com/company/legal/Services_Data_Collection_Disclosure#technical-support	443
www.synology.com/company/term_packagecenter.php	443

## Appendix 2. Data Sync and Map Drive

### Data Sync

After the NAS server and the JB-199 mini II karaoke players are setup in the ship network/VLAN323 with their own respective local IP addresses, the NAS server can next be connected to CAVS HQ NAS server using VPN for data synchronization.

- In a JB-199 mini II karaoke player, open the Google Chrome browser and navigate to "NAS server IP address:5000". You will see the signin page of the NAS server.
- Input the username and password to enter. Select Control Panel > Network > Network Interface.
- Click on "VPN-Connection" and press "Connect". A message "Connected" will appear showing you the connection is successfully made. Close the Control Panel.
- Sign out of the NAS server by selecting the User Account at the top right corner of the screen. Sign in again and confirm that the "Synology Drive ShareSync" icon appears at the top right corner of the screen. Sign out of the NAS server and close the Google Chrome browser in the JB-199 mini II player.

### Map Drive

- In the JB-199 mini II, open the File Explorer and go to Documents > JB-199 mini. Right click on the mapdrive.json file and select edit.
- Replace the IP address shown in the mapdrive.json file with the local IP address of the NAS server. Do not change anything else, such as port number, etc.
- Save and close the editor and close the File Explorer. Restart the karaoke program in the JB-199 mini II.
- When the karaoke program restarts, confirm that the network drive X:\ is activated.

## Appendix 3. Advertisement and Background video

### File Format

File formats recommended for the Advertisement and Background video are as follow.

- Photo
  - JPG, BMP
  - 16:9 (for example 1920 x 1080)
- Video
  - MP4
  - 16:9 (for example 1920 x 1080)
  - 15 - 30 fps
  - Embedded audio is automatically muted

### Loading

After the contents for the Advertisement and Background video are created, contact Princess Cruise / Entertainment Department for loading of the contents onto the NAS server.

## **Advertisement Sync**

After the Data sync and Map drive are established between the CAVS HQ NAS server, the ship NAS server, and the JB-199 mini II karaoke players, the Advertisement sync and BGV Sync can next be established as follows.

- In a JB-199 mini II karaoke player, go to the Control Panel > Function Menu > Advertisement.
- Click on the Load button at the far right side. Navigate to X:\AdvLibrary and select Adv.txt to open..
- Click on Playlist in the Function Menu.

## **Background Video Sync**

- In a JB-199 mini II karaoke player, go to the Control Panel > Function Menu > Pictures.
- Click on the Load button at the far right side. Navigate to X:\BgvLibrary and select Bgv.txt to open..
- Click on Playlist in the Function Menu.

**Reboot the JB-199 mini II to store the new settings.**

# **END**